


8 bit FLASH DIP



Standard FLASH Pinouts (29F256 - 29F040)

| Device | Capacity | Organization |
|--------|----------|--------------|
| 29F256 | 256Kbit | (32K x 8) |
| 29F512 | 512Kbit | (64K x 8) |
| 29F010 | 1Mbit | (128K x 8) |
| 29F020 | 2Mbit | (256K x 8) |
| 29F040 | 4Mbit | (512K x 8) |

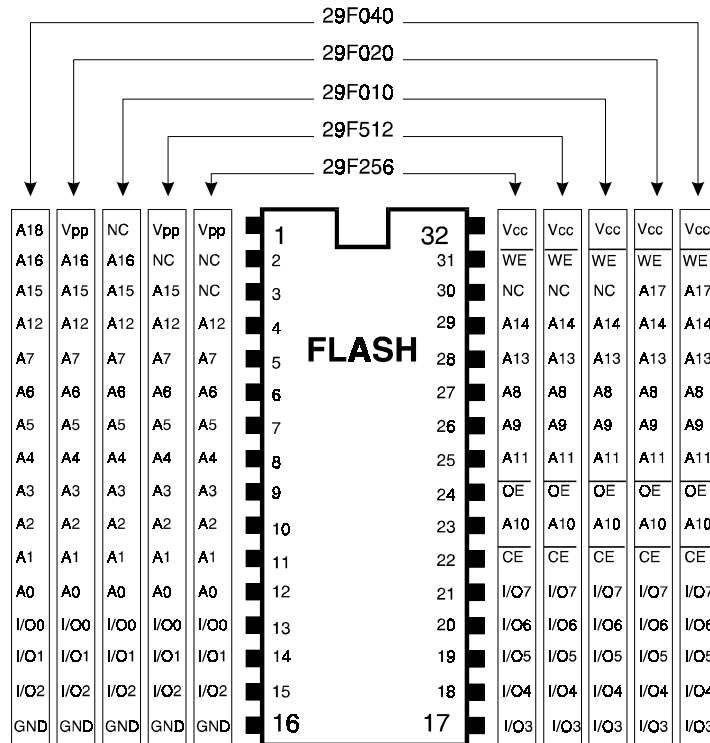

TechTools
P.O. Box 462101, Garland, TX 75046
(214) 272-9392 FAX: (214) 494-5814

C DATE: 01/24/96

ITEM# JD-792

DEVICE PINOUTS

SHEET 02 OF 5

FLASH - DIP